

Interactive tech sheet

This interactive tech sheet contains clickable links and QR codes that provide instant access to specific information related to Vortex[™] Spas or Swim Spas.

Simply click or scan these QR codes to dive deeper into the features, maintenance tips, and expert advice tailored just for you.

When you see these icons, you can click or scan:

Click on QR code



Scan QR code



We hope you find the information helpful. Please get in touch if you have any questions about any Vortex[™] Spas product. We are here to help!

From the Vortex[™] Spas Team.





JETS

Up to 64



WATER CAPACITY

7,045 litres



SEATING

Up to 7 seats



DIMENSIONS 5.89 x 2.30 x 1.28/1.49m



FEATURES

Build

- Heavy-duty heat-dipped galvanised, timber-free frame with a Lifetime Warranty
- \bullet Superior USA-made Aristech™ acrylic for added peace of mind
- Thermobond™ 4-Layer shell construction for superior durability
- Nine colours combinations to suit your preferences
- Duraflex™ 'No kink' PVC plumbing ensures no plumbing worries
- Thermoclad™ Maintenance-free cabinet
- \bullet ThermoLock $^{\!\scriptscriptstyle\mathsf{TM}}$ Dual layer insulation to reduce energy consumption
- ThermoLock™ High Impact moulded ABS base
- \bullet Hydroflow $\ensuremath{^{\text{TM}}}$ Stainless steel bearing-less jets for long life
- Dual Filter Banks for balanced swim conditions

Control

- SpaNet™ Premium control systems with dynamic thermal tuning for energy savings
- Premium SpaNet™ Touchpad for ease of use

Lighting

- Hydroglow™ Underwater LED floodlight
- \bullet Hydroglow $^{\text{\tiny{TM}}}$ LED backlit water cascade to set the scene
- Hydroglow[™] Programmable lighting for full control
- Hydroglow™ Jet & topside control lighting
- Hydroglow™ Perimeter & cabinet lighting
- Hydroglow™ Backlit drink holders
- Hydroglow™ Backlit laminar jets

Water Care

- Twin Purezone™ Filter banks for maximum filtration
- \bullet Purezone $^{\text{\tiny{TM}}}$ AOS System with UV and ozone automatic water care

Hydrotherapy

- Neck Therapy Collar[™] to melt away back and shoulder tension
- Hydrotherapy lounger for superior post-training relaxation
- Individual seat pressure controls for a tailored hydrotherapy experience
- · Adjustable spa jets for customised massages

Optional Extras

- Vortex™ Audio WiFi Kit—Control your spa and enjoy your favourite music or podcasts
- SmartLINK™ WiFi Module—Remotely monitor and control your spa
- EcoCube™ Hybrid heat pump—Save up to 75% on spa heating costs in winter and cool your spa in summer (Spa End)
- SpaNet™ SV heat pump (Swim Spa End)
- ClearLift™ Automatic cover
- Swimming Pole

WARRANTIES

Frame	Lifetime
Shell structure	10 yrs
Acrylic surface	•
Jets, plumbing & heater	-
Pumps & equipment	5 vrs

^{*} Conditions apply. Specifications may change without notice. Pictures may show options not available on all models.

^{**} These warranties are valid for all products delivered after December 31st, 2023. Products delivered before that date are covered under the previous warranties. Please refer to the Vortex Spas warranty card attached to this tech pack to find more information.



$Hydrozone^{\scriptscriptstyle{\mathsf{T}}}$

Height Comparison

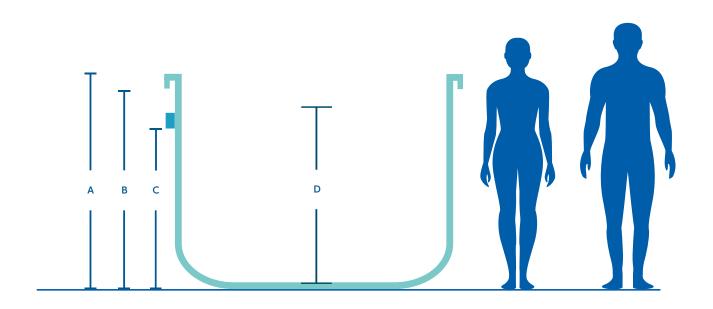


Illustration shows Hydrozone $\mathsf{XD^{\mathsf{TM}}}$ 1.5m swim spa model

		Hydrozone™	Hydrozone XD™
	Model dimensions	5.89(L) x 2.30(W)	5.89(L) x 2.30(W)m
Α	Total height +-20mm	1.28m	1.49m
В	Product height under lip +-20mm	1,180mm	1,400mm
С	Height to bottom of health light +-25mm	991mm	1,195mm
D	Water depth from floor to recommended fill level	1,070/665mm	1,290/665mm



Jet Specifications

Dimensions: 5.89 x 2.30 x 1.28/1.49m

The spa jet configuration is the same on all Hydrozone™ and Hydrozone XD™ swim spa models.

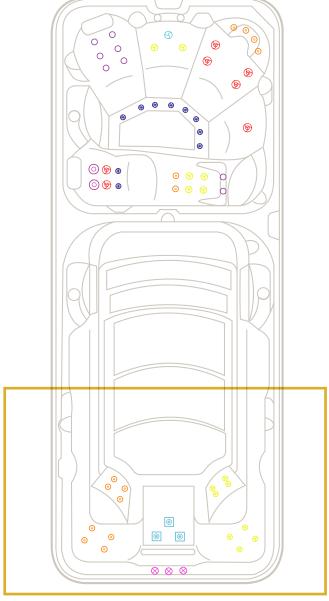


Illustration shows our most popular swim spa Hydrozone $\operatorname{Pro+}^{\text{\tiny{TM}}}$ model.



140mm Single Roto Jets



140mm Directional Jets



100mm Directional Jets



50mm Air Jets



63mm Directional Jets



63mm Roto Jets




100mm Single Roto Jets




Laminar Jets


Hydrozone Plunge™




Hydrozone Pro™



Hydrozone Pro+™



Hydrozone Extreme[™]





127mm Square Swim Jets

* Conditions apply. Specifications may change without notice. Pictures may show options not available on all models.



Specifications Table (Non-ClearLift™ models)

		Plunge™	Pro™	Pro Plus™	Extreme™	
Water capacity						
Hydrozone™	1.3m	7,045L	7,045L	7,045L	7,045L	
Hydrozone XD™	1.49m	7,474L	7,474L	7,474L	7,474L	
Dry weight		(Note: For ClearLift™ models see next page.)				
Hydrozone™	1.3m	1,380kg	1,431kg	1,480kg	1,530kg	
Hydrozone XD™	1.49m	1,450kg	1,500kg	1,531kg	1,575kg	
Filled weight (incl o	cover)	(Note: For ClearLift™ models see next page.)				
Hydrozone™	1.3m	8,122kg	8,173kg	8,222kg	8,272kg	
Hydrozone XD™	1.49m	8,982kg	9,032kg	9,063kg	9,107kg	
Lift weight**		(Note: For ClearLift™ models see next page.)				
Hydrozone™	1.3m	1,758kg**	1,819kg**	1,878kg**	1,938kg**	
Hydrozone XD™	1.49m	1,843kg**	1,903kg**	1,940kg**	1,993kg**	
Intuitive spa contro	oller	SV2 + SV3	SV2 + SV3	SV2 + SV3	SV2 + SV4	
Power cable length***		SV2 - 5m cable SV3 - Hardwired by a licensed electrician	SV2 - 5m cable SV3 - Hardwired by a licensed electrician	SV2 - 5m cable SV3 - Hardwired by a licensed electrician	SV2 - 5m cable SV4 - Hardwired by a licensed electrician	
Programmable circulation pump		2	2	2	2	
Jet pumps		1 + 1	2 + 1	3 + 1	4 + 1	
Variable speed air	blower	1	1	1	1	
Variable output he	ater	3kW + 5.25kW	3kW + 5.25kW	3kW + 5.25kW	3kW + 5.25kW	
Recommended electrical supply		15 + 32 amps	15 + 32 amps	15 + 32 amps	15 + 40 amps	

^{**} The specified lift weights in the table above include the spa's dry weight, packaging, hard cover and water, but not the pallet weight. These are approximate weights and are intended as a guide only. All weights must be checked by the crane operator prior to the lift. (Cranes have the ability to check the weight)



^{***} The cable length is measured from the spa control box to the plug. For instance, if you prefer to exit the cable from the rear of a 2m spa (on the side opposite the control box), the length of the cable outside the spa will be only 3m (subtracting the 2m from the control box to the rear of the spa from the total cable length of 5m).

^{*} Conditions apply. Specifications may change without notice. Pictures may show options not available on all models.

Specifications Table (ClearLift[™] models)

	Plunge™	Pro™	Pro Plus™	Extreme™			
Water capacity							
Hydrozone™ 1.3r	n 7,045L	7,045L	7,045L	7,045L			
Hydrozone XD™ 1.5r	n 7,474L	7,474L	7,474L	7,474L			
Dry weight	(Note: For Non-ClearLif	(Note: For Non-ClearLift™ models see previous page.)					
Hydrozone™ 1.3r	n 1,536kg	1,587kg	1,636kg	1,686kg			
Hydrozone XD™ 1.5r	n 1,606kg	1,656kg	1,687kg	1,731kg			
Filled weight (incl cover)	(Note: For Non-ClearLif	(Note: For Non-ClearLift™ models see previous page.)					
Hydrozone™ 1.3r	n 8,258kg	8,309kg	8,358kg	8,408kg			
Hydrozone XD™ 1.5r	n 9,118kg	9,168kg	9,199kg	9,243kg			
Lift weight**	** (Note: For Non-ClearLift™ models see previous page.)						
Hydrozone™ 1.3r	n 1,894kg**	1,955kg**	2,014kg**	2,074kg**			
Hydrozone XD™ 1.5r	n 1,979kg**	2,039kg**	2,076kg**	2,129kg**			
Intuitive spa controller	SV2 + SV3	SV2 + SV3	SV2 + SV3	SV2 + SV4			
Power cable length***	SV2 - 5m cable SV3 - Hardwired by a licensed electrician	SV2 - 5m cable SV3 - Hardwired by a licensed electrician	SV2 - 5m cable SV3 - Hardwired by a licensed electrician	SV2 - 5m cable SV4 - Hardwired by a licensed electrician			
Programmable circulation pump	2	2	2	2			
Jet pumps	1 + 1	2 + 1	3 + 1	4 + 1			
Variable speed air blow	er 1	1	1	1			
Variable output heater	3kW + 5.25kW	3kW + 5.25kW	3kW + 5.25kW	3kW + 5.25kW			
Recommended electrical supply	15 + 32 amps	15 + 32 amps	15 + 32 amps	15 + 40 amps			

^{**} The specified lift weights in the table above include the spa's dry weight, packaging, hard cover and water, but not the pallet weight. These are approximate weights and are intended as a guide only. All weights must be checked by the crane operator prior to the lift. (Cranes have the ability to check the weight)




operator prior to the lift. (Cranes have the ability to check the weight)

*** The cable length is measured from the spa control box to the plug. For instance, if you prefer to exit the cable from the rear of a 2m spa (on the side opposite the control box), the length of the cable outside the spa will be only 3m (subtracting the 2m from the control box to the rear of the spa from the total cable length of 5m).


^{*} Conditions apply. Specifications may change without notice. Pictures may show options not available on all models.

Hydrozone Plunge™

Equipment Location

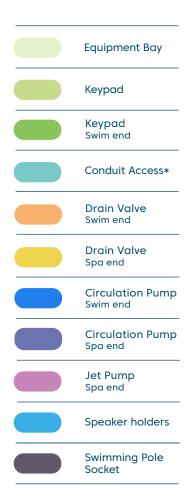

* Conduit should not stick above the concrete slab more than 100mm.

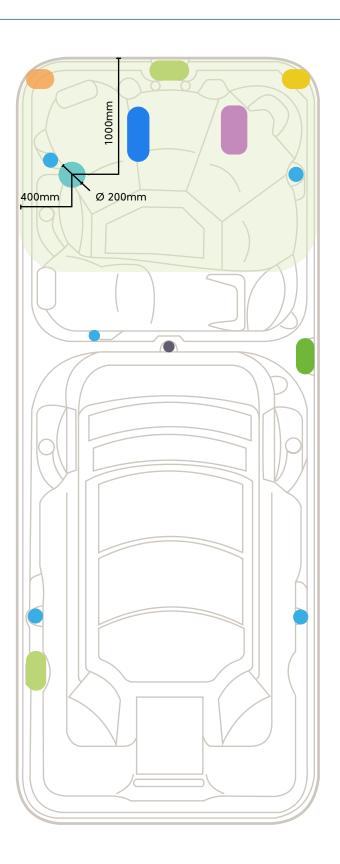




Hydrozone Pro™

Equipment Location



* Conduit should not stick above the concrete slab more than 100mm.

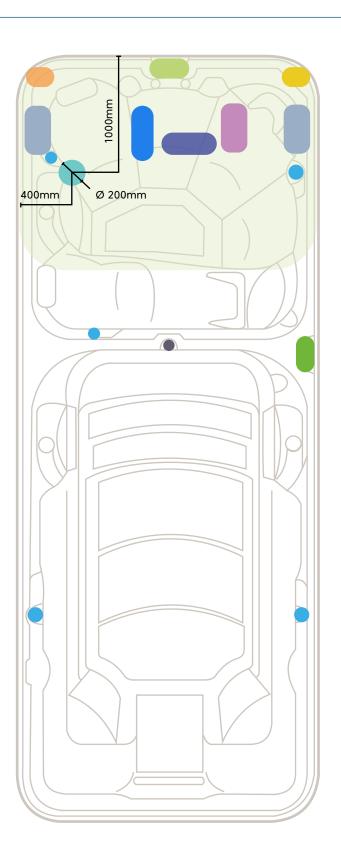




Hydrozone Pro+™

Equipment Location



* Conduit should not stick above the concrete slab more than 100mm.

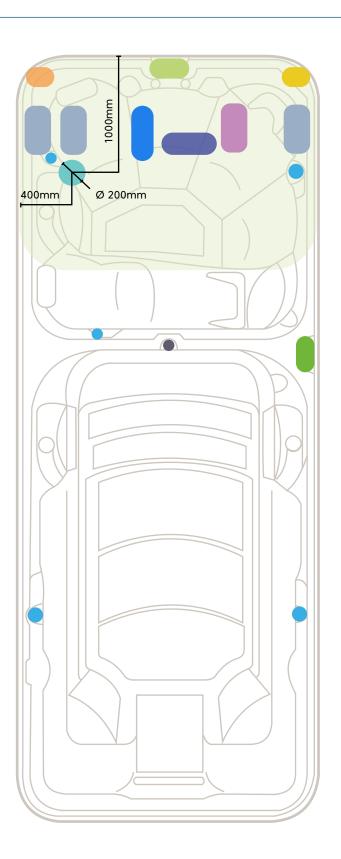




Hydrozone Extreme™

Equipment Location




* Conduit should not stick above the concrete slab more than 100mm.

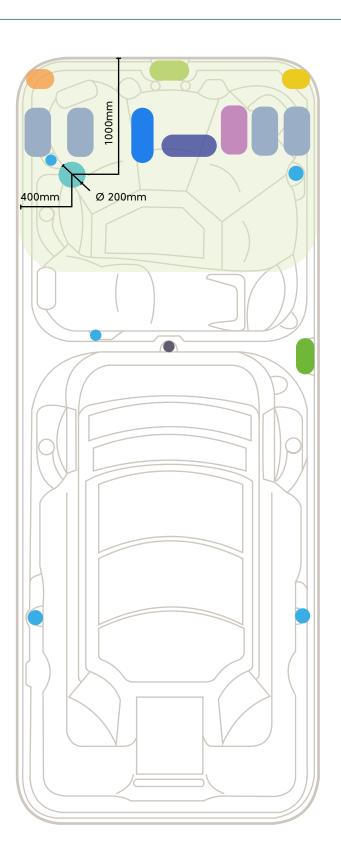




Standard Spa Cover

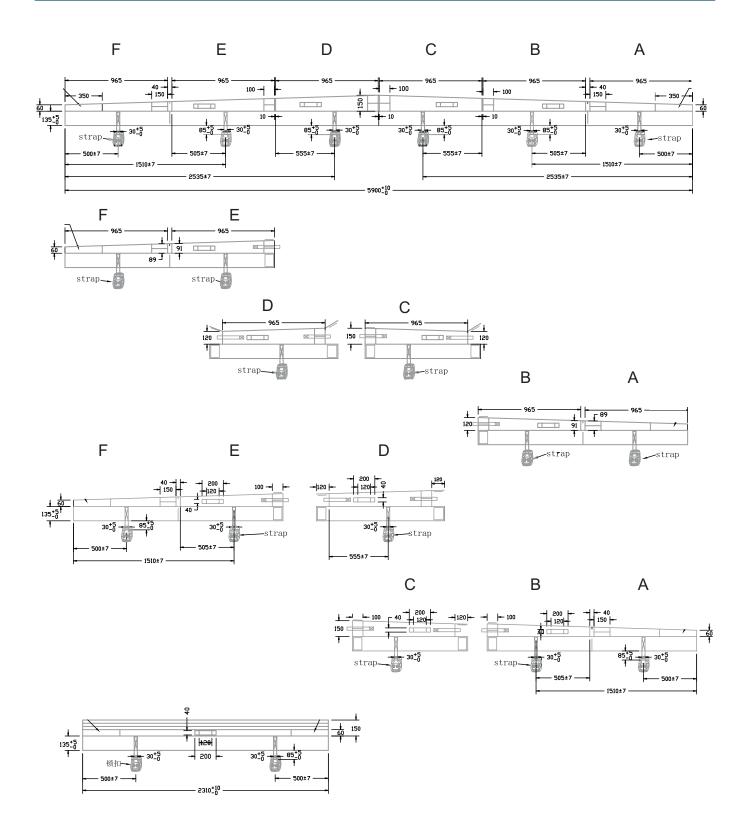




Optional ClearLift™ Cover

Left-mounted opening




Right-mounted opening



If the ClearLift[™] control panel is positioned on the right side of the swim spa, and the ClearLift[™] cover folds to the left, it is considered a **Left-Mounted ClearLift**[™].

Conversely, if the ClearLift™ control panel is located on the left side of the swim spa, and the ClearLift™ cover folds to the right, it is referred to as a **Right-Mounted ClearLift**™

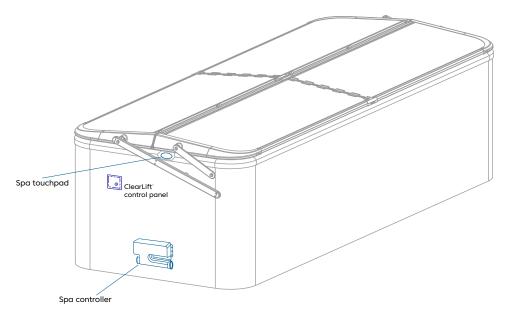

*The illustration shows **Right-mounted** opening, side angle view.


Note: The ClearLift™ control panel is installed at the same end as the swim spa controller keypad.




$Hydrozone^{\scriptscriptstyle \mathsf{T}}$

Optional ClearLift™ Cover opening allowance

Left mount, side view shown in Vortex™ swim spas 1,300mm height.

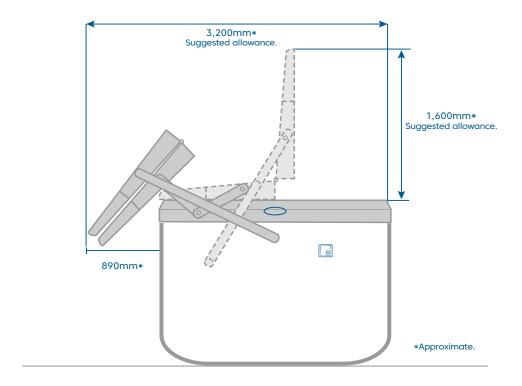

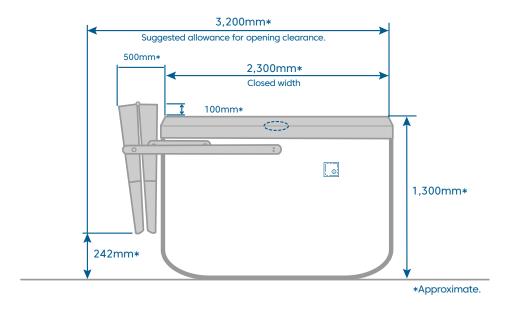





Hydrozone XD™

Optional ClearLift™ Cover opening allowance

Left mount, side view shown in Vortex™ swim spas 1,500mm height.

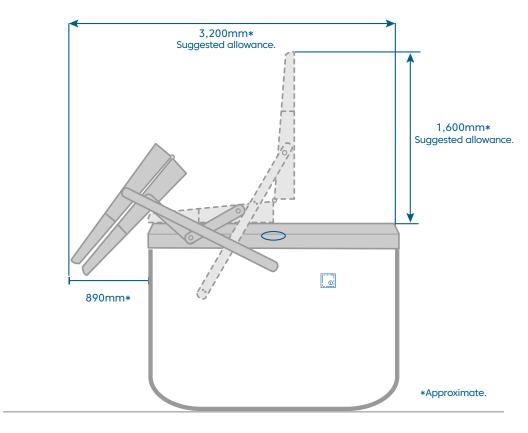

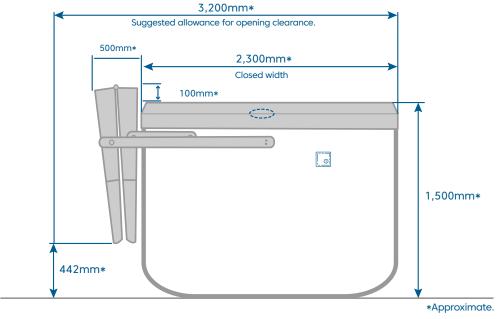



Planning for your Spa Delivery

What to know when planning for delivery and installation. Please visit the Spa World website for planning information including:

- Property access
- Electrical information
- Service access
- Foundations, including generic slab
- Pit and deck installation
- Optional heat pump installation,

To access these information and more:

Click on QR code

Scan QR code





Planning for your spa delivery
Pre-Delivery Guide for Spa Owners 2024





Vortex Spas™ Plumbing Certificates

To access each of the Vortex Hydrozone models' Plumbing Certificates, please click or scan the QR code associated with each model.

Click on QR code



Scan QR code



Vortex Hydrozone™ Plunge Plumbing Certificate



Vortex Hydrozone™ Extreme Plumbing Certificate



Vortex Hydrozone™ Pro Plumbing Certificate



Vortex Hydrozone™ Pro+ Plumbing Certificate





Vortex Spas™ Certificates

To access the Vortex Hydrozone™ Generic Concrete Slab/ Structural Certificates, please click or scan the QR code associated with each model.

Click on QR code



Vortex[™] Swim Spas Generic Concrete Slab Certificate



Vortex Hydrozone XD™ Structural Certificate



Scan QR code



Vortex Hydrozone™ Structural Certificate





Vortex Spas[™] Limited Warranty

To access the Vortex $\mathsf{Spas}^\mathsf{TM}$ Limited Warranty:

Click on QR code



Scan QR code



Vortex Spas[™] 2024 Limited Warranty



Vortex Spas[™] Pre-2024 Limited Warranty





Vortex Spas™ Owner's Manuals

To access more information about Vortex[™] Spa:

Click on QR code



Scan QR code



Vortex Spas™ Owner's Manual



Vortex Spas™ Audio WiFi Manual



ClearLift™ Cover Manual





Available exclusively at 5pa WORLD