

Fisher Swim™

Technical Information Pack



**FISHER™
SPAS**

FSTP161224NOSW

Interactive tech sheet

This interactive tech sheet contains clickable links and QR codes that provide instant access to specific information related to Fisher™ Spas or Swim Spas.

Simply click or scan these QR codes to dive deeper into the features, maintenance tips, and expert advice tailored just for you.

When you see these icons, you can click or scan:

Click on QR code



Scan QR code



We hope you find the information helpful. Please get in touch if you have any questions about any Fisher™ Spas product. We are here to help!

From the Fisher™ Spas Team.

Fisher Swim™



JETS

36



SEATING

5 seats



DIMENSIONS 2.31 x 4.49 x 1.30m

SPECIFICATIONS

Dry weight *	1,102 kg
Water capacity	6,120 litres
Filled weight*	7,258 kg
SmartFlo™ jet pump(s)	3 x 2.5 hp
SmartFlo™ circulation pump	1
SmartFlo™ air blower	1
Electrical requirements	32amp

* Does not include optional upgrade ClearLift™ cover weight. See the specifications table page for this info.

FEATURES

- FisherFrame™ galvanised steel frame
- DuraClad™ long life cabinet
- QuadCore™ shell construction
- HeatSeal™ shell insulation
- HeatSeal™ perimeter insulation
- UV automatic water steriliser
- Ozone automatic water clarifier
- SpaNet™ SV3 Controller
- FisherFlex™ plumbing system
- SoftTouch™ head rest
- Stainless steel jets
- Wide mouth filtration
- FisherGlow™ in-spa illumination
- FisherGlow™ LED perimeter lighting
- Integrated heat pump control

OPTIONAL UPGRADES

- SpaNet™ hybrid pump
- Fisher™ Audio & WiFi system
- Fisher Spas™ swim pole kit
- ClearLift™ automatic cover

WARRANTIES

FisherFrame™	Lifetime
Non-Pro-rata Structural	10yrs
Non-Pro-rata Acrylic Surface	5yrs
Plumbing, Heater & Jets	5yrs
Pumps & Equipment	2yrs


* Conditions apply. Specifications may change without notice.
May be pictured with some options included.



This is living



**FISHER
SPAS**

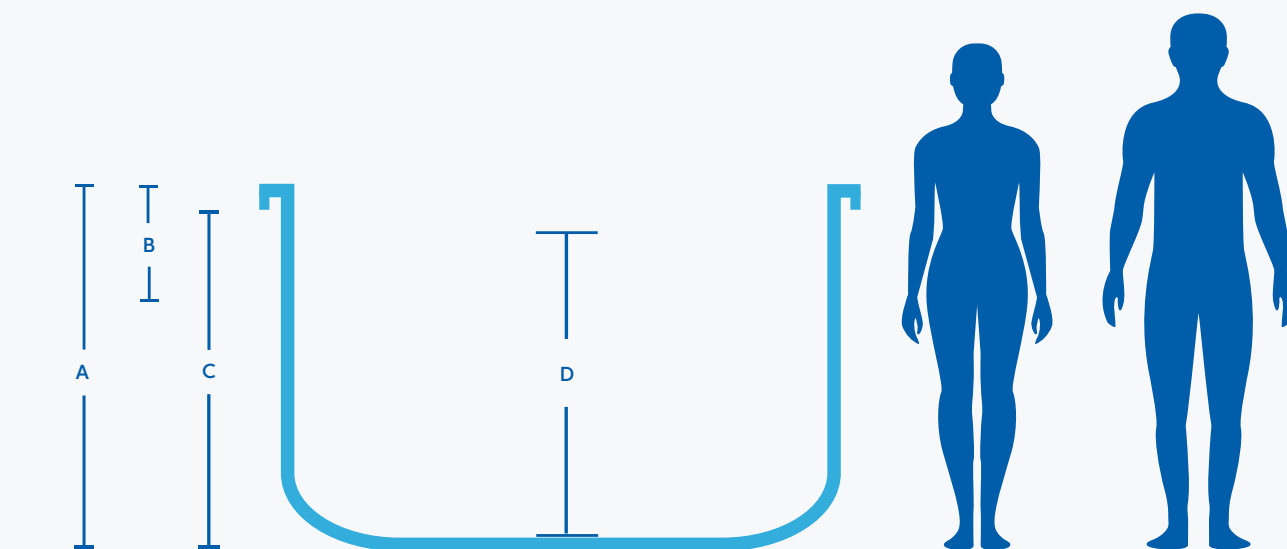


Fisher Swim™		
Spa dimensions		2.31(L) x 4.49(W)m
A	Total height	1.30m
B	Recommended deck height. From top shell. No lower than	400mm
C	Product height under lip +-20mm	1,205mm
D	Water depth from floor to recommended fill level	1,105mm

Specification	No ClearLift™ models	ClearLift™ models
Water capacity	6,120L	6,120L
Dry weight	1,102kg	1,243kg
Filled weight (incl cover)	7,258kg	7,379kg
Lift weight**	1,383kg	1,504kg
Intuitive spa controller	SV3	SV3
Programmable circulation pump	1	1
Jet pumps	3	3
Variable speed air blower	1	1
Variable output heater	5.25kW	5.25kW
Recommended electrical supply	32Amps	32Amps

* Conditions apply. Specifications may change without notice. Pictures may show options not available on all models.

** The specified lift weights in the table above include the spa's dry weight, packaging, hard cover and water, but not the pallet weight. These are approximate weights and are intended as a guide only. All weights must be checked by the crane operator prior to the lift. (Cranes have the ability to check the weight)

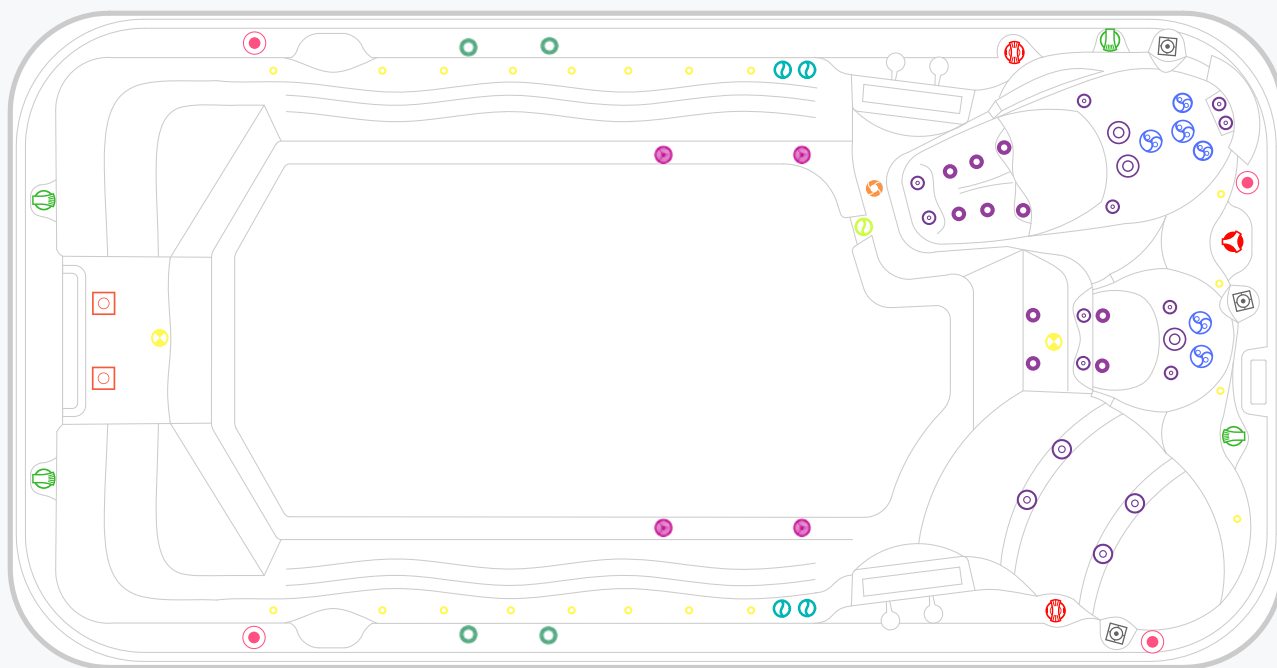

4 x Air Controls



1 x Waterfall Valve



2 x Diverter Valve



4 x 88mm Directional Jets



2 x 88mm Roto Jets



10 x 50mm Directional Jets



6 x Suction



10 x Air Jets



1 x Ozone Jet



4 x Cup Holders



2 x Lights



5 x Drain



4 x Vents



3 x 127mm Directional Jets



20 x Perimeter Lights



3 x Speakers



3 x Swim Jets



4 x 127mm Roto Jets



4 x Laminar Jets

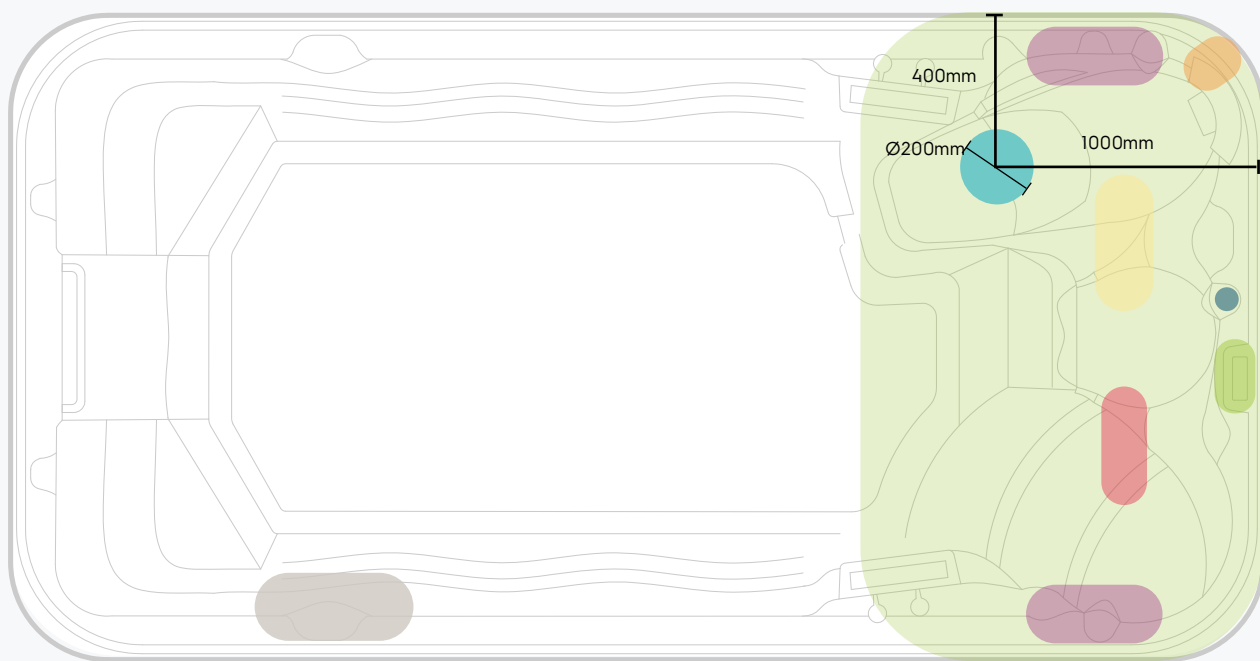



Illustration shows Fisher Swim™ spa pool model

 Equipment Bay	 Drain Valve	 Circulation Pump
 Keypad	 Jet Pump	 Heater
 Conduit Access	 Subwoofer**	 Swim pole socket


* Conduit access should be no more than 100mm high above the concrete slab.

** Optional upgrade only included with the Fisher WiFi and Audio Kit.


Note: This model has a rigid base, and if you choose to bring the piping conduit in from the bottom through the base, you will need to cut a hole into the base on-site before installation. The factory does not provide this hole. Please see the diagram above to find the location where you can drill the hole.

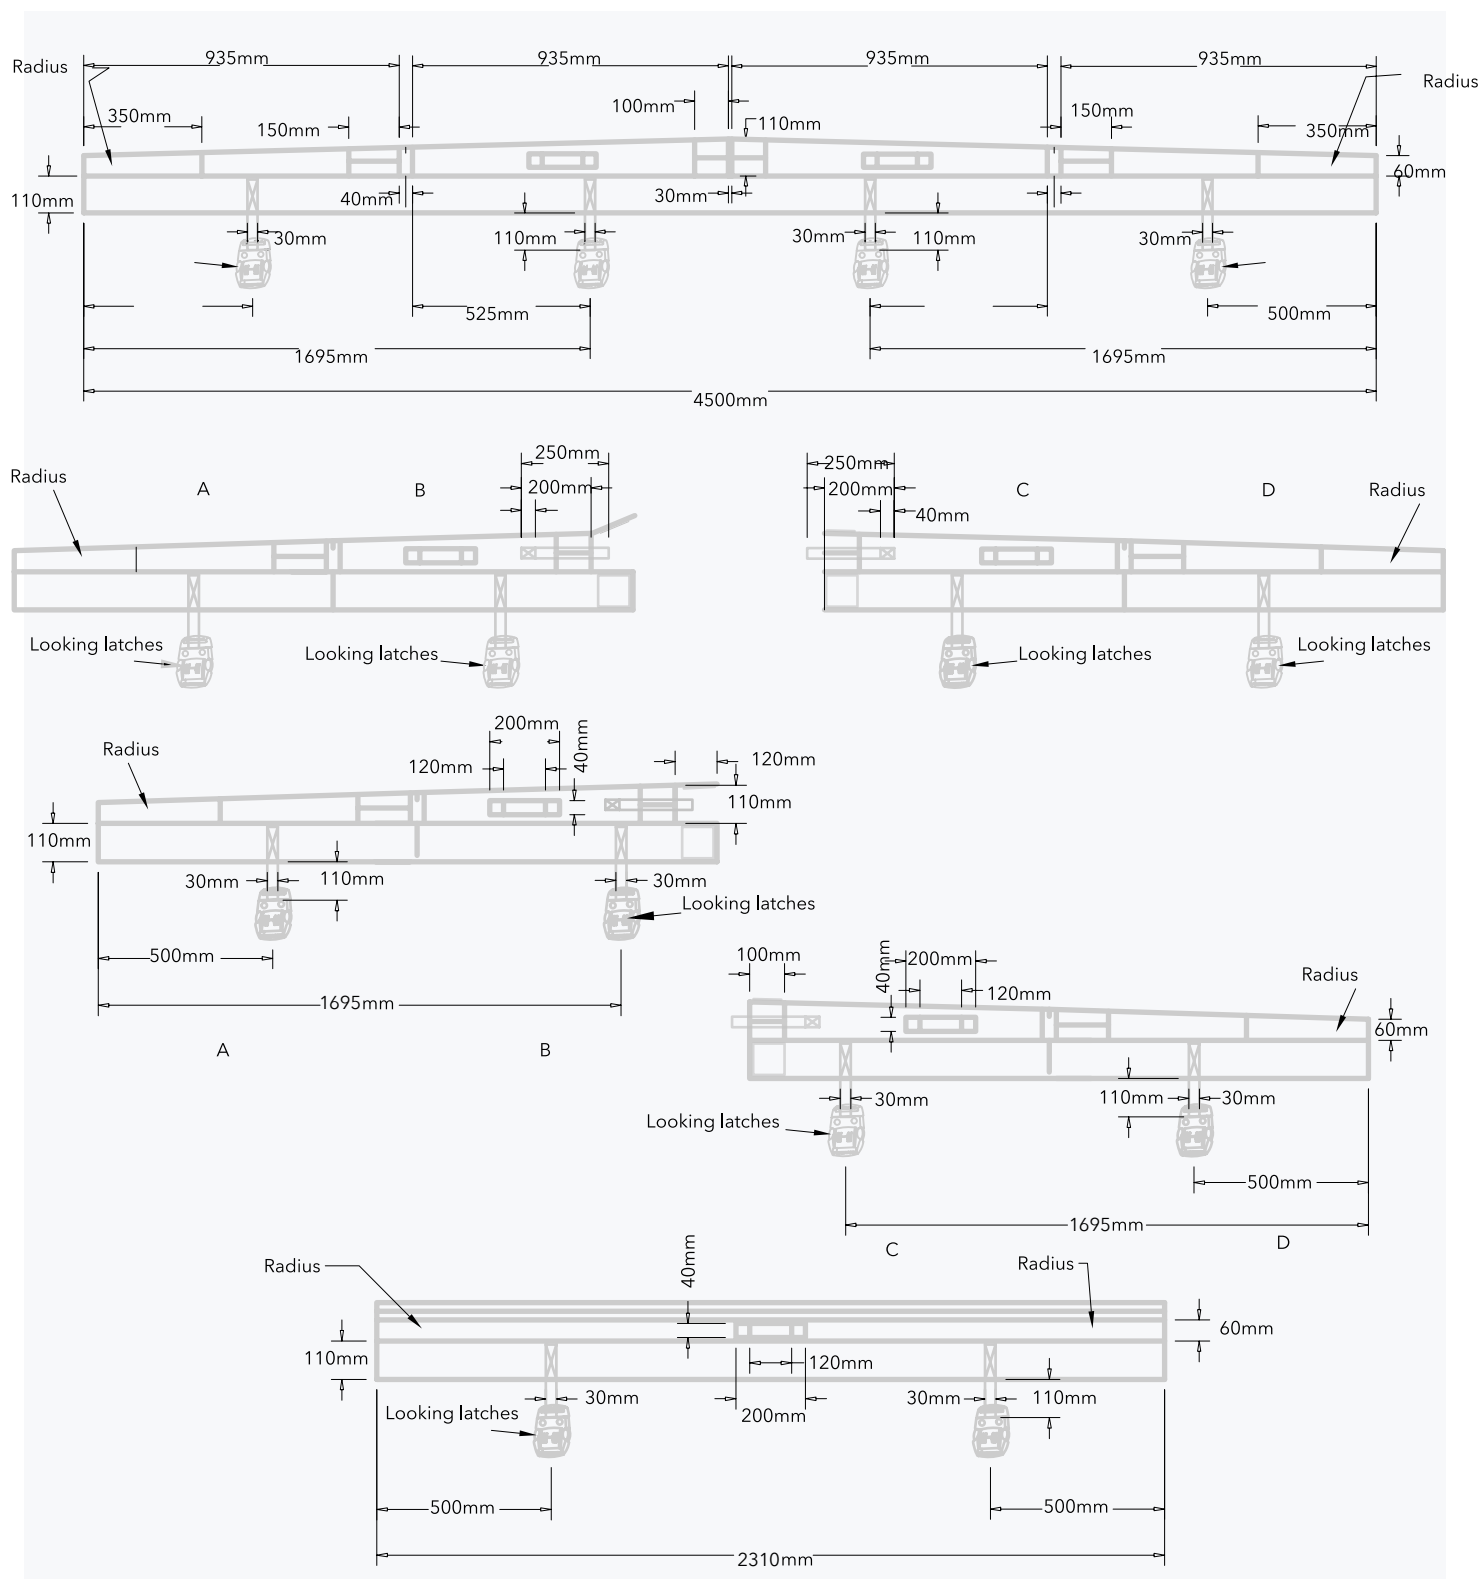

Left-mounted opening

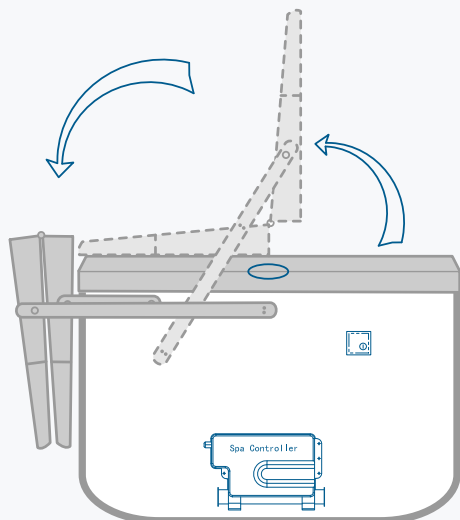


Right-mounted opening

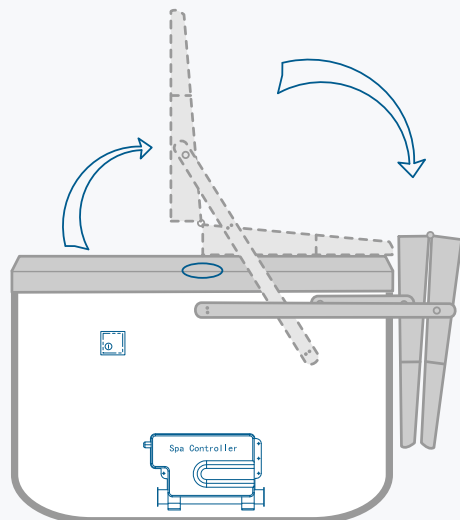

If the ClearLift™ control panel is positioned on the right side of the swim spa, and the ClearLift™ cover folds to the left, it is considered a Left-Mounted ClearLift™.



Conversely, if the ClearLift™ control panel is located on the left side of the swim spa, and the ClearLift™ cover folds to the right, it is referred to as a Right-Mounted ClearLift™

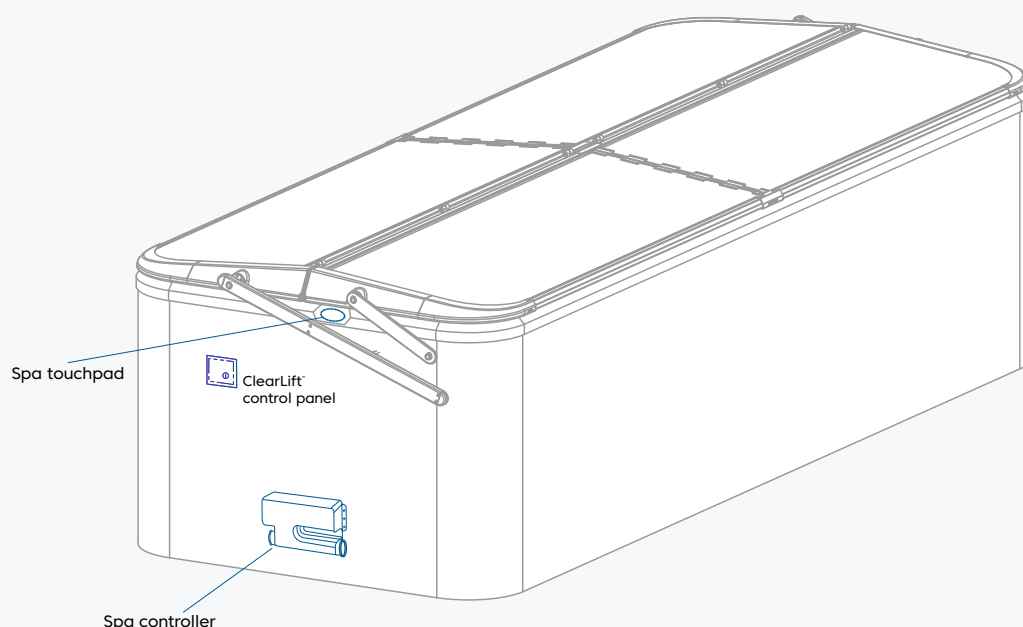

*The illustration shows Right-mounted opening, side angle view.

Note: The ClearLift™ control panel is installed at the same end as the swim spa controller keypad.

Left mount, side view shown in Fisher™ swim spas 1,300mm height.

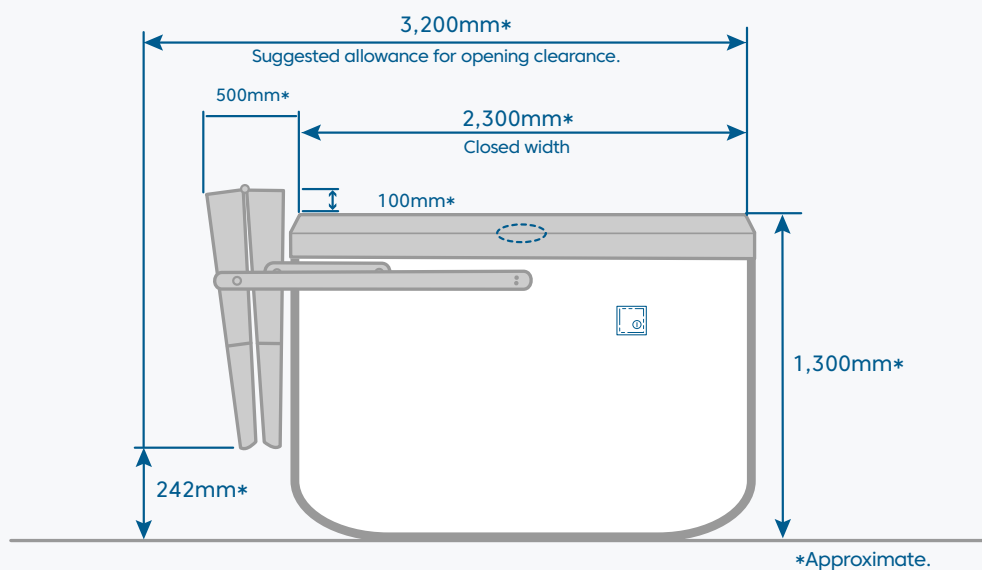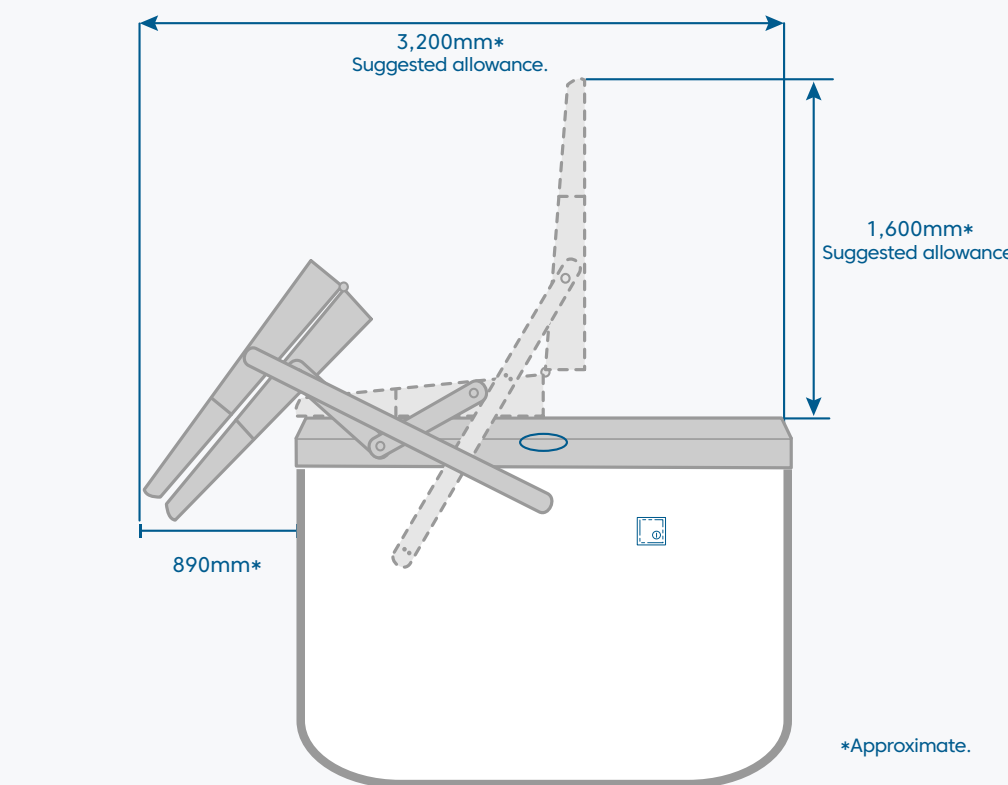

To access the ClearLift™ Installation Manual, please click or scan the QR code below.

Click on QR code



Scan QR code



**ClearLift™ Cover
Installation Manual**



To access the Fisher™ Swim Spas Generic Concrete Slab Certificate/ Plumbing Certificate/ Structural Certificate, please click or scan the QR code bellow.

Click on QR code



**Fisher™ Swim Spas
Generic Concrete Slab
Certificate**



Scan QR code



**Fisher Swim™
Plumbing Certificate**



**Fisher Swim™
Structural Certificate**




To access the Fisher™ Spas Owner's Manual / Audio WiFi Kit Manual/ SpaNet™ SV Series Heat Pump Installation and Instruction Manual/ Fisher™ Spas Warranty, please click or scan the QR codes bellow.

Click on QR code



Fisher™ Spas
Owner's Manual




SpaNet™ SV Series Heat
Pump Installation and
Instruction Manual



Scan QR code



Fisher™ Spas
Audio WiFi kit



Fisher™ Spas
Warranty





**FISHER™
SPAS**